


BDC Series

Battery Discharger **B1**

Technical Features

- Can operate with batteries of any type
- Automatically shuts down
- PC interface (miniUSB)

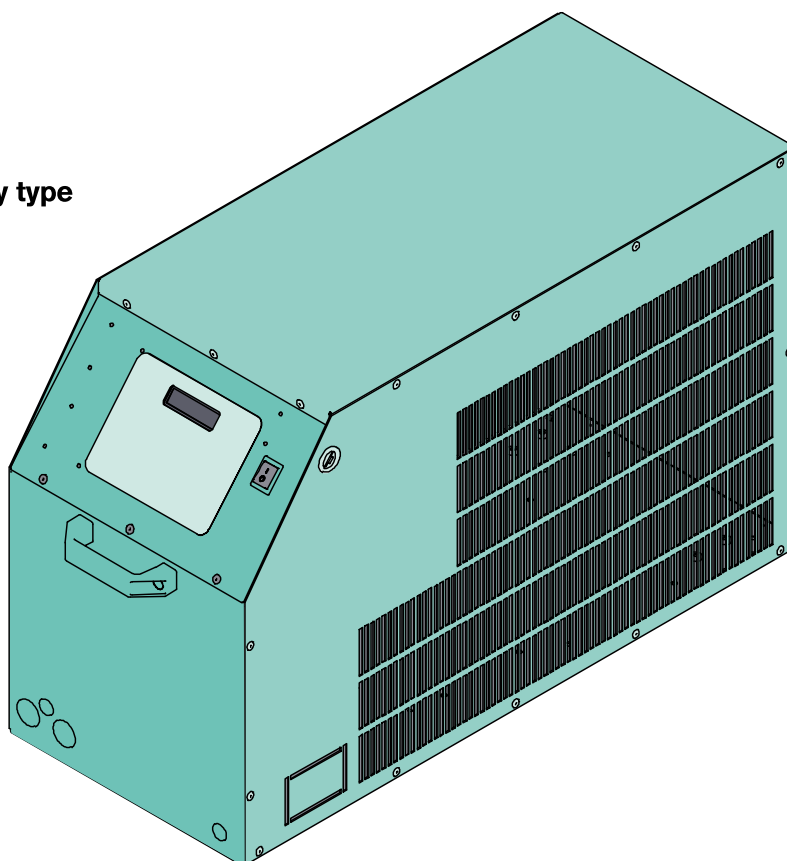


GENERIC CODE	BATTERY VOLTAGE	CHARGING CURRENT
BDC-048-200	48	200
BDC-096-200	96	200
BDC-135-150	135	150
BDC-240-075	240	75
BDC-400-040	400	40
BDC-500-025	500	25
BDC-600-015	600	15

STANDARDS	
Quality	ISO 9001:2008
Marking	CE
EMC	IEC EN 61000-6-2, IEC EN 61000-6-4
Safety	IEC EN 50178, IEC EN 062040-1

MECHANICAL	
Cooling	Air Cooled
IP level	IP21 (Standard) IP54(Optional)
Ambient Temperature	-10°C to +45°C
Storage Temperature	-20°C to +70°C
Humidity	<75%
Altitude (m)	>2000m according to EN62040-3

SPECIFICATIONS	
Line Voltage (VAC) ±10%	Single Phase: 120, 230

DISCHARGE APPLICATION SCENARIO
All type of Battery

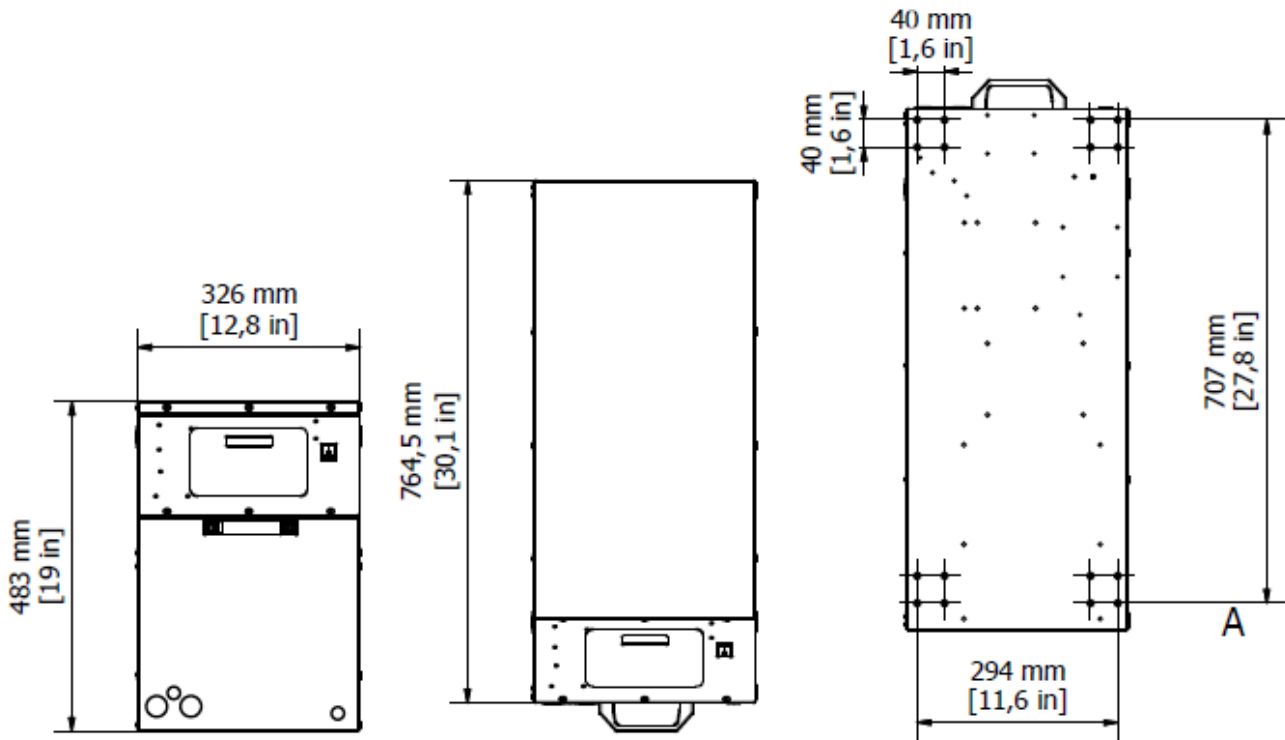

HOUSING DIMENSION		
L (front) mm	W (side) mm	H mm
326	765	483

