

UBC Series



Universal
Battery
Chargers

A1

Technical Features

- Suitable for charging modes:
Conventional
Opportunity
- Customizable charging curves
- Customizable CAN BUS communication
(only for Lithium Battery)

GENERIC CODE	BATTERY VOLTAGE	CHARGING CURRENT	MAX POWER (KW)
LI-C06-024-200-A1	24	200	6
LI-C08-024-250-A1	24	250	8
LI-C09-048-150-A1	48	150	9
LI-C12-048-200-A1	48	200	12
LI-C15-048-250-A1	48	250	15
LI-C10-080-100-A1	80	100	10
LI-C15-080-150-A1	80	150	15
LI-C20-080-200-A1	80	200	20
LI-C12-096-100-A1	96	100	12
LI-C18-096-150-A1	96	150	18

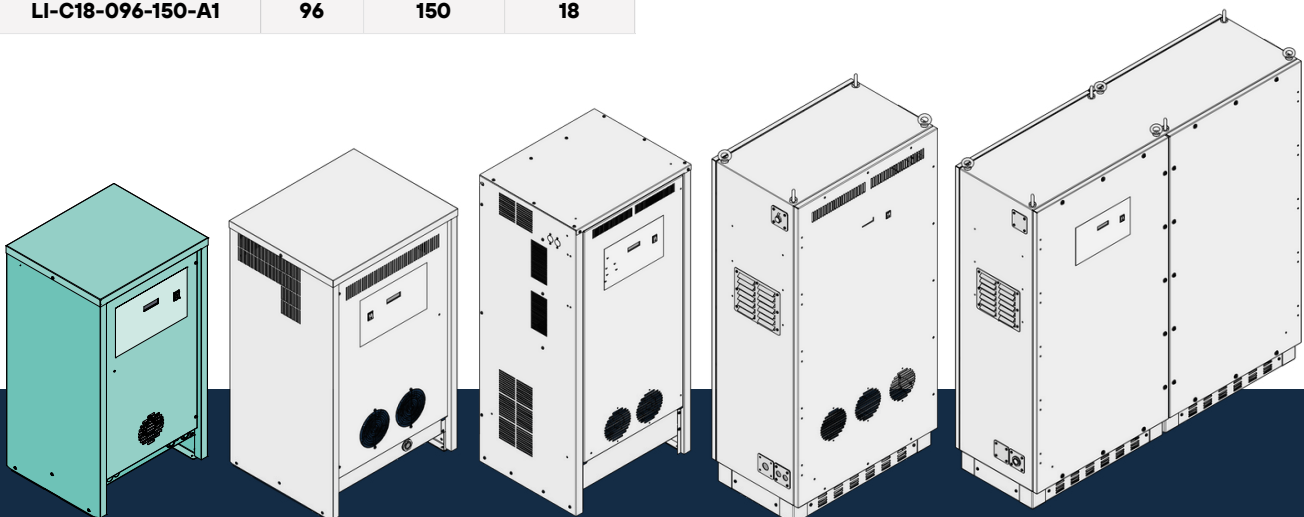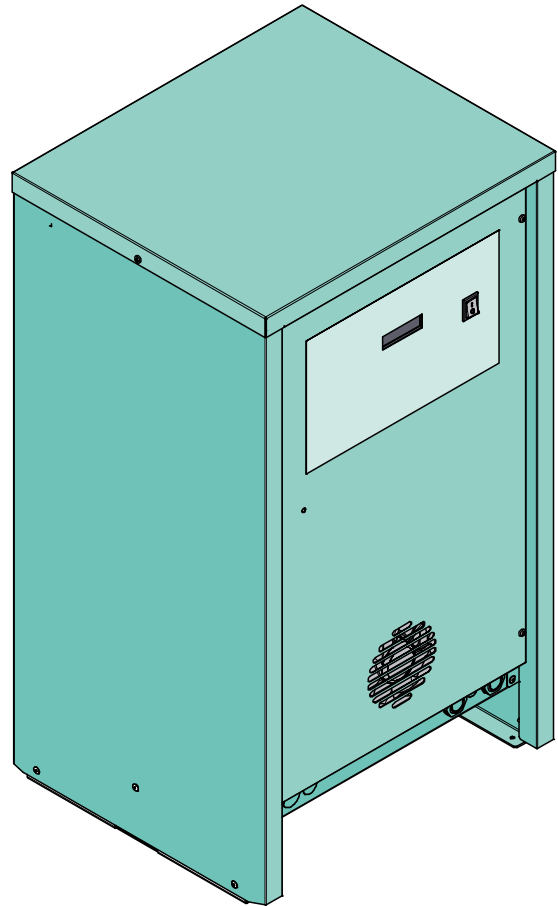

A1

A2

A3

A4


A5

STANDARDS	
Quality	ISO 9001:2008
Marking	CE, CEC
EMC	IEC EN 61000-6-2, IEC EN 61000-6-4
Safety	IEC EN 50178, IEC EN 062040-1
Test and Performance	IEC EN 62040-3
North American Standards	UL 1564, CSA 22.2 107.2-01

MECHANICAL	
Cooling	Air Cooled
IP level	IP21 (Standard) IP54(Optional)
Ambient Temperature	-10°C to +45°C
Storage Temperature	-20°C to +70°C
Humidity	<75%
Altitude (m)	>2000m according to EN62040-3

SPECIFICATIONS	
LineVoltage(VAC) ±10%	208, 220,240,400,440,480,600
Frequency(Hz)	50/60Hz±5%
PowerFactor	>98%
Efficiency	>93%

CHARGING APPLICATION SCENARIO
Sealed Battery: Flooded, GEL, VRLA
Lithium Battery: Can Bus Interface

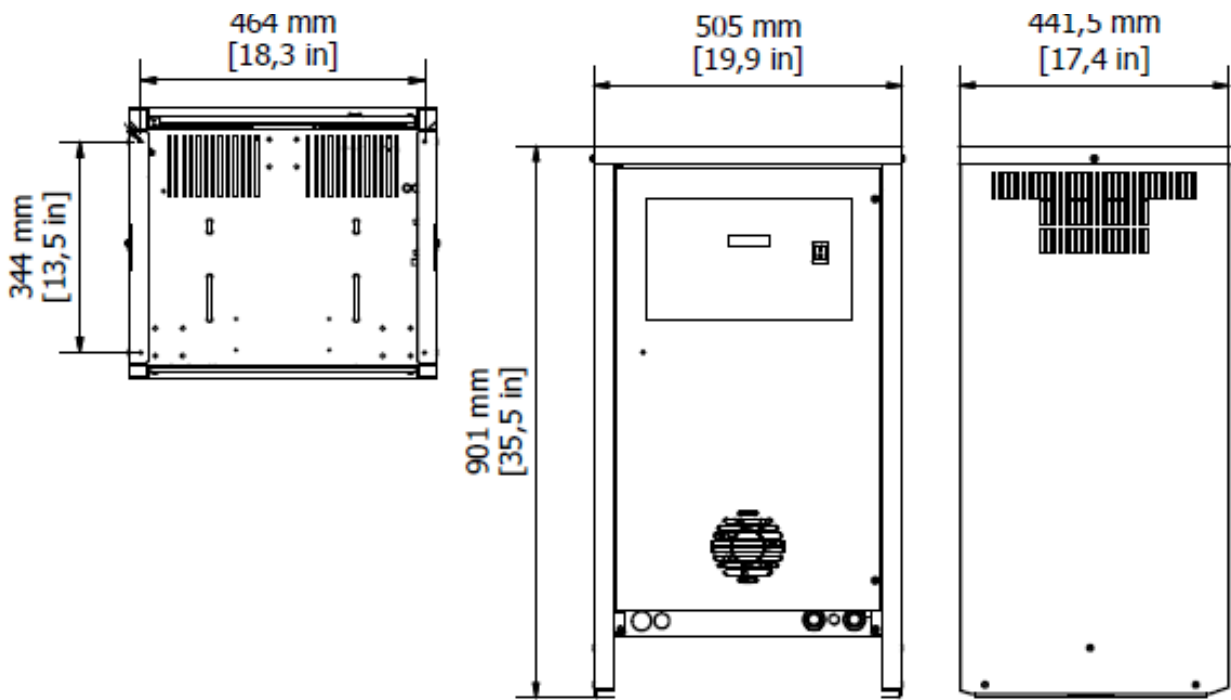

HOUSING DIMENSION		
L (front) mm	W (side) mm	H mm
505	442	901

