

UBC Series



Universal
Battery
Chargers

A2

Technical Features

- Suitable for charging modes:
Conventional
Opportunity
Fast Charging
- Customizable charging curves
- Customizable CAN BUS communication
(only for Lithium Battery)

GENERIC CODE	BATTERY VOLTAGE	CHARGING CURRENT	MAX POWER (KW)
LI-C09-024-360-A2	24	360	9
LI-C14-036-300-A2	36	300	14
LI-C12-048-200-A2	48	200	12
LI-C15-048-250-A2	48	250	15
LI-C17-048-300-A2	48	300	18
LI-C24-048-400-A2	48	400	24
LI-C18-059-250-A2	59	250	18
LI-C24-059-320-A2	59	320	24
LI-C20-080-200-A2	80	200	20
LI-C24-080-250-A2	80	250	24
LI-C30-080-320-A2	80	320	30
LI-C12-096-100-A2	96	100	12
LI-C17-096-150-A2	96	150	17

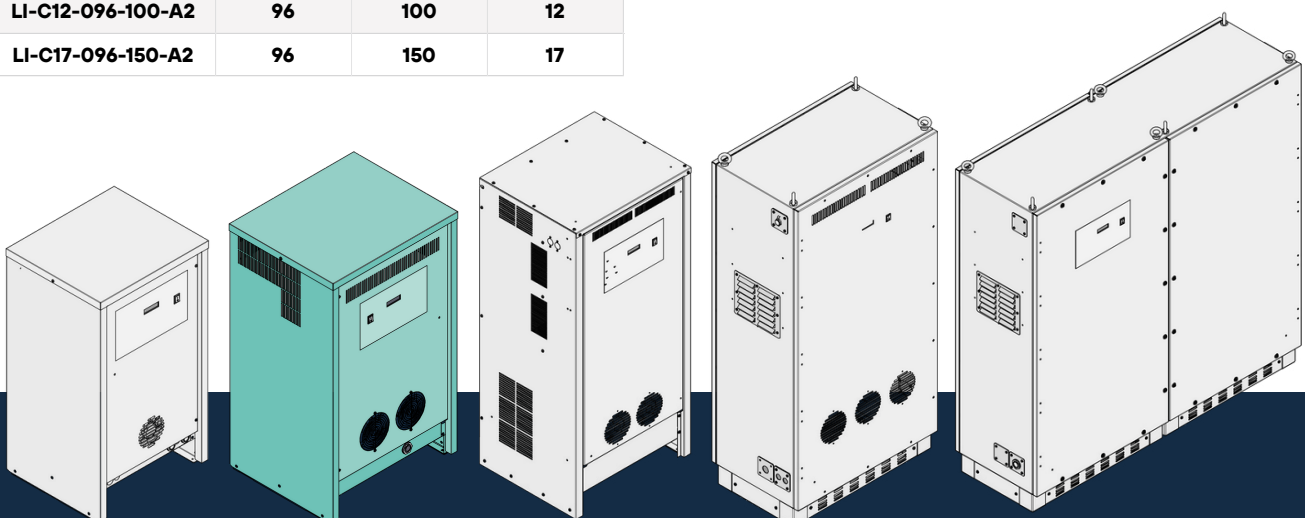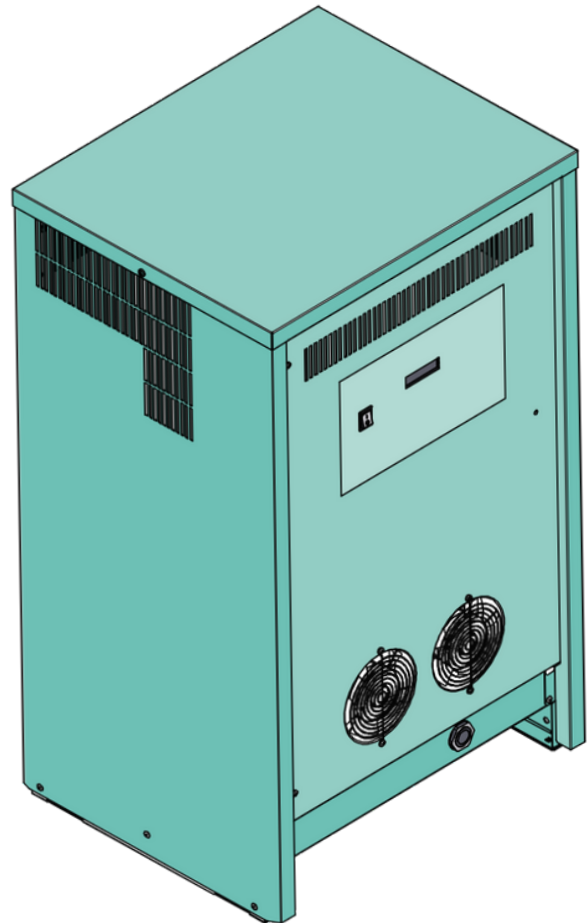

A1

A2

A3

A4


A5

STANDARDS	
Quality	ISO 9001:2008
Marking	CE, CEC
EMC	IEC EN 61000-6-2, IEC EN 61000-6-4
Safety	IEC EN 50178, IEC EN 062040-1
Test and Performance	IEC EN 62040-3
North American Standards	UL 1564, CSA 22.2 107.2-01

MECHANICAL	
Cooling	Air Cooled
IP level	IP21 (Standard) IP54(Optional)
Ambient Temperature	-10°C to +45°C
Storage Temperature	-20°C to +70°C
Humidity	<75%
Altitude (m)	>2000m according to EN62040-3

SPECIFICATIONS	
LineVoltage(VAC) ±10%	208, 220,240,400,440,480,600
Frequency(Hz)	50/60Hz±5%
PowerFactor	>98%
Efficiency	>93%

CHARGING APPLICATION SCENARIO
Sealed Battery: Flooded, GEL, VRLA
Lithium Battery: Can Bus Interface

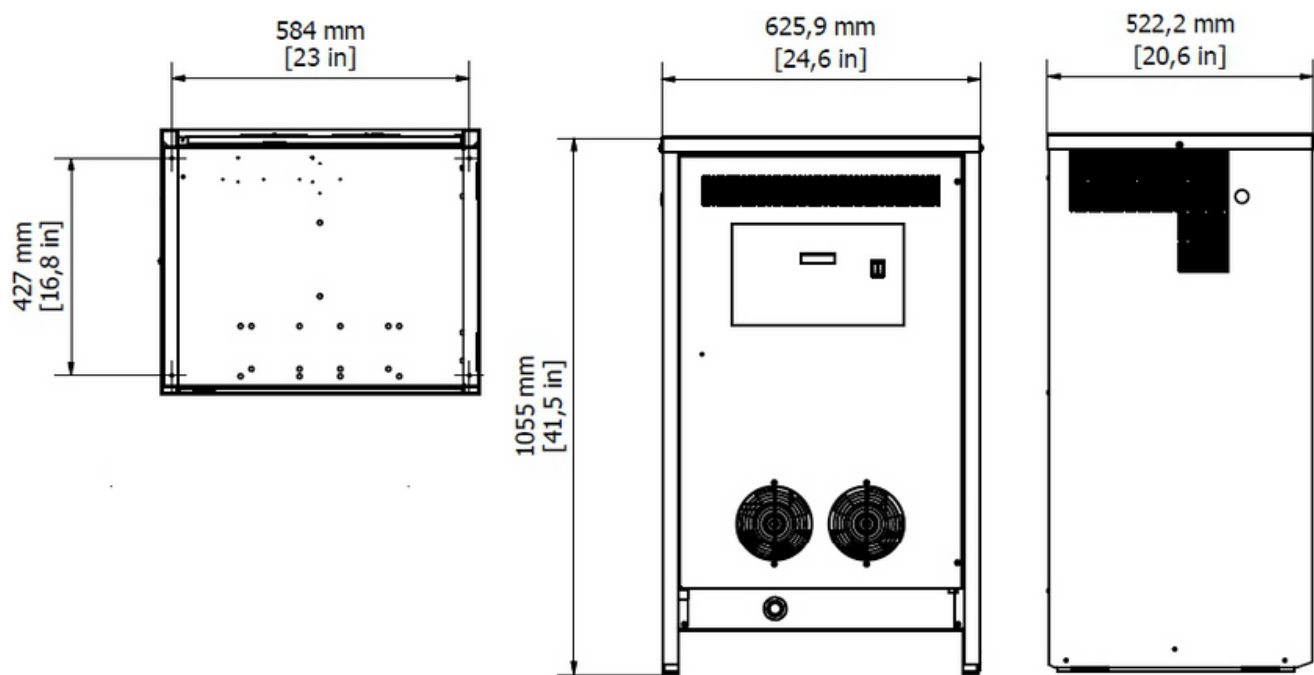

HOUSING DIMENSION		
L (front) mm	W (side) mm	H mm
626	552	1055

